



# XAG P100 2022

## Technical Specifications

Version AU V1.0 **EN**




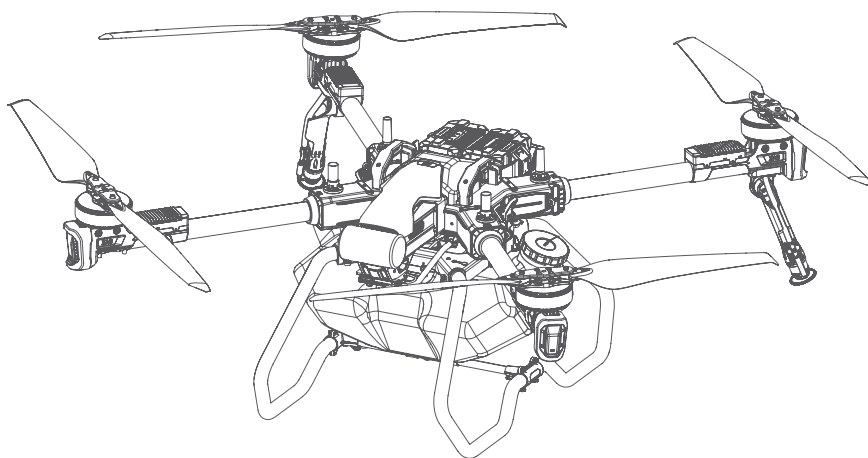


# TECHNICAL SPECIFICATIONS

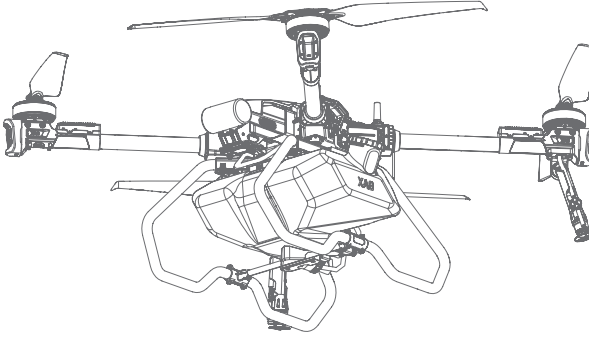

## P100 Agricultural RPA

Product Model	3WWDZ-40AH
Flight Control System	SuperX4 Pro
IP Rating	IPX7
Arm Material	Glass Fibre + Carbon Fibre Composite

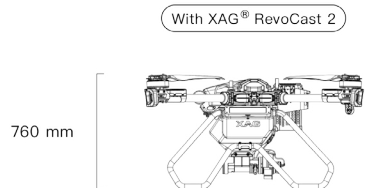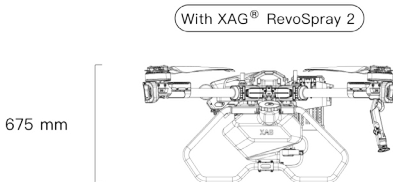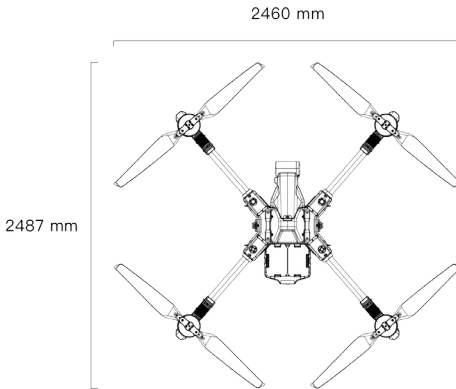

# Flight Parameters

Total Weight (No Module + Battery)	39.60 Kg
Empty Weight (Empty Container + Battery)	48.00 Kg (With RevoSpray Module) 53.00 Kg (With RevoCast Module)
Max Take-off Weight (Full Container + Battery)	88.00 Kg (With RevoSpray Module) 93.00 Kg (With RevoCast Module)
Max. Thrust-Weight Ratio	1.8
Load Ratio	0.45
Operating Frequency	SRRC: 2.4000GHz – 2.4835GHz
Transmission Power (EIRP)	2.4GHz SRRC: 20 dBm
Hovering Accuracy Range (With Strong GNSS Signal)	RTK Enabled: ±10cm (Horizontal) ±10cm (Vertical) RTK Disabled: ±0.6m (Horizontal) ±0.3m (Vertical)
RTK / GNSS Operating Frequency	GPS: L1/L2 GLONASS: L1/L2 BDS: B1/B2 Galileo: E1/E5b
Operating Frequency	2.4GHz / 5.8GHz
Sustainable High Precision Navigation with RTK Delay	≤600s
Hovering Time <sup>[2]</sup>	17 min (Take-Off weight of 48Kg @20000mAh x 2) 7min (Take-Off weight of 88Kg @20000mAh x 2)
Max. Operating Speed	13.8m/s (With Good GNSS Signal)
Max. Flying Height	30m
Max. Flying Distance	2000m
Max Service Ceiling Above Sea Level <sup>[3]</sup>	4000m
Recommended Operating Temperature	-10°C to 40°C

## Propulsion System

Motors	
Model	A45
Stator Size	136mm x 27mm
Max Power	4000W / Motor
Max Tension	45KG / Motor
KV Value	78RPM / V
ESCs	
Model	VC13200
Max Working Current (Continuous)	200A
Max Operating Voltage	56.4V
Foldable Propellers	
Model	P4718
Diameter x Pitch	47 x 18 inch
Weight	280g per Blade
Gross Weight	760g

## PSL Camera

Model	RD24412
Dimensions	70mm x 40mm x 25mm
Voltage	24V – 60V
Resolutions	720P / 1080P
Frame Rate	30fps
Coding Format	H.264
Focal Length	3.2mm
Image Sensor	1/2.9-inch CMOS Sensor

# Obstacle Sensor & Avoidance System

4D Imaging Radar <sup>[1]</sup>	
Model	RD24412
Operating Frequency	24 GHz
Voltage	24V – 60V
Power Consumption	6.5W
Sensing Range	1.5m ~ 40m
Sensing Mode	Millimetre-wave Imaging, MIMO
Sensing Parameters	Obstacle's Position, Distance, Relative Speed
Field of View (FOV)	Horizontal: ±40° Vertical: -45° to 90°
Safety Limit Distance	2.5m (Distance between the propeller tip and the obstacles after braking and hovering)
Working Conditions	Relative Height: ≥1.5m Relative Speed: ≤8m/s


Terrain Sensor	
Model	TR24S100
Voltage	12V
Power	1.5W
Sensing Mode	Millimeter-wave
Operating Frequency	24GHz
Altitude detection range	0.5~ 100m (Relative Height from Vegetation)
Fixed Height Range	1 ~ 30m (Relative Height from Vegetation)
Max. Gradient	45° (Flight Speed ≤ 2m/s)

[1] Effectiveness of the Obstacle radar is dependent on the obstacle's material, location, distance, shape, size, relative velocity, etc.

[2] Hovering time acquired at sea level with wind speeds lower than 3m/s


[3] Maximum load needs to be reduced by 12% for each additional 1,000 m in altitude

# RevoSpray System

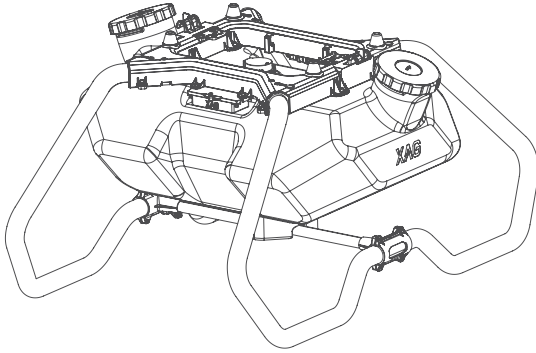


Liquid Tank	
Model	M4TANP40A
Material	PE
Volume	40L
Dimension	947.5mm x 734.5mm x 472 mm
Sensor	Liquid Level Sensor
Nozzle	
Nozzle Type	Centrifugal
Quantity	2
Rotational speed of Spray disc	1000RPM – 16000RPM
Spray Swath	5m – 10m
Droplet Size	60µm – 500µm
Peristaltic Pump	
Quantity	2
Voltage	50V
Max Flow Rate	6L/min (Single Pump) 12L/ min (Both Pump)

# RevoCast System

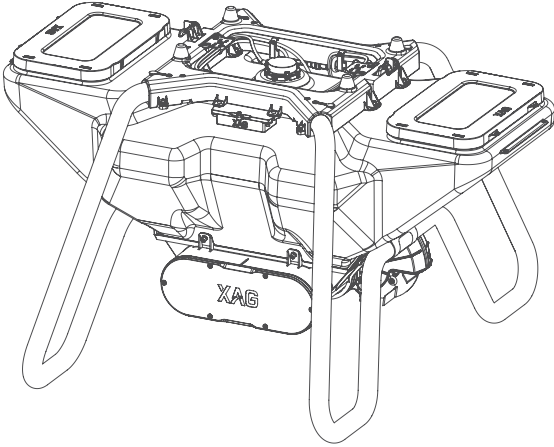

Model	M4RC-60B-P
Dimension	983mm x 873mm x 573mm
Net Weight	13.00Kg
Rated Capacity	60L
Rated Load	40Kg
Optimal Operating Temperature	0° C to 40° C
Storage Temperature	0° C to 40° C
IP Rating	IP65
Applicable granule Size	1-6mm (Dry Solid Granule)


# Local Network Terminal

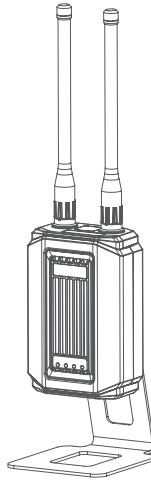

Local Network Terminal	
Model	13LNT-1
Dimensions	93mm x 54mm x 332mm
Weight	Approx. 760g
Power Input	DC 12V/3A
Operating Temperature	0° C to 50° C
IP Rating	IP54
Communication Protocol	Wi-Fi
Operating Frequency	2400 – 2483.5 MHz
Antenna	TNC Port, 2dBi
Warranty Details	12 Months
Power Adapter	
Dimensions	101mm x 86mm x 37mm
Weight	Approx. 335g
Power Input	DC 40 – 54V (B13960S Battery Adaptor)
Power Output	DC 12V/3A
Power	36W
Operating Temperature	0° C to 50° C
IP Rating	IP54




## Remote Controller

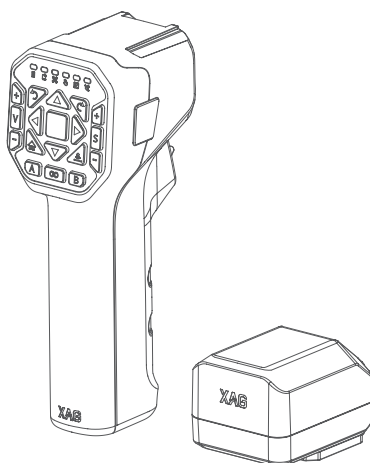


Model	ACS2G	
Dimensions	76mm x 60mm x 177mm	
IP Rating	IP54	
Operating Frequency	2.4GHz / 5.8GHz	
Transmitting Power (EIRP)	2.4GHz	SRRC ≤ 20dBm;
	5.8GHz	SRRC ≤ 26dBm;
Supported Operating System	Android, IOS	
Build-in Battery	5000mAh / 37Wh	
Charging Temperature	0° C to 45° C	
Operating Temperature	-20° C to 55° C	
	-20° C to 20° C	< 1 Month
	-20° C to 45° C	1 – 3 Months
Storage Temperature	-20° C to 55° C	3 – 12 Months
Max Transmission Distance (Unobstructed, free of interference)	800 Meters	
Charging Voltage / Current	05V / 2A	
	09V / 1.5A	
	12V / 1.5A	
Mesh Network	Supported	
Voice Broadcast	Supported	
RTK Operating Frequency	GPS:	L1/L2
	GLONASS:	L1/L2
	BDS:	B1/B2
	Galileo:	E1/E5b
Positioning Accuracy (With strong RTK Signal)	Vertical:	< 5.0cm + 1ppm (RMS)
	Horizontal:	< 7.5cm + 1ppm (RMS)
Warranty Details	12 Months	

# Smart Battery

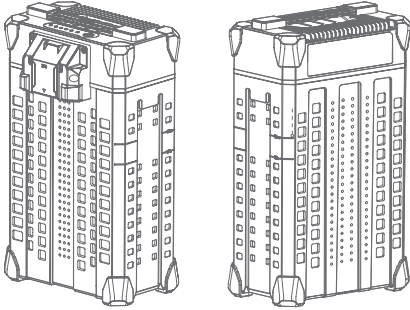


Model	B13960S
Dimensions	189mm x 139mm x 317mm
Weight	Approx. 6.7 kg
Battery Type	Lithium Polymer
Capacity	20000 m/Ah
Energy	962 Wh
Rated Output	48.1V / 120A
Operating Temperature	10° C to 45° C
Charging Temperature	10° C to 40° C
Storage Temperature	10° C to 30° C
IP Rating	IP65
Compatible Aircraft	XAG V40 2021 XAG P40 2021 XAG P100 2022
Compatible Chargers	CM12500P GC4000+
Charging Voltage	56.55V
Battery Charging Time	
Warranty Details	6 Months

# Battery Charger

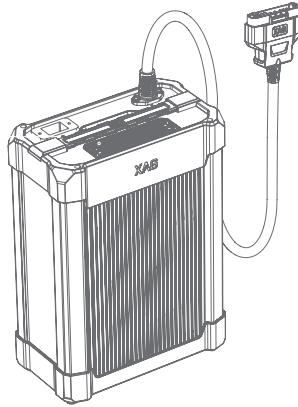

Model	CM12500P
Compatible Battery	B13960S B13860S (With Plug A1 Adapter)
Dimensions	242mm x 137mm x 337mm
Weight	Approx. 9.0 kg
Operating Temperature	-10° C to 45° C
Storage Temperature	-20° C to 55° C
Cooling Mode	Outer Air Cooling
Operating Altitude	≤ 3000m
Input	AC 90-165V ~ 50/60Hz 23A (Max) AC 180-260V ~ 50/60Hz 23A (Max)
Output	DC 50-60V/25A (Max) / 1250W (AC 90-165V ~ 50/60Hz) DC 50-60V/50A (Max) / 2550W (AC 180-260V ~ 50/60Hz)
Warranty Details	12 Months

# GNSS XRTK4 Mobile Station

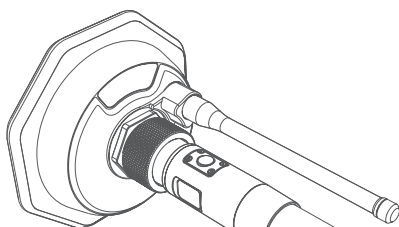

## RTK Positioning Module for Agricultural Use

Model	XRTK4
Dimensions (Diameter x Height)	154mm x 83.6mm (RTK Module) 154mm x 1230mm (RTK Module + Rod)
Weight	1.5 Kg (RTK Module)
Port/Panel	Button x 3, Positioning Indicator x 1 Networking Indicator x 1, Power Indicator x 1
IP Rating	IP65
Operating Temperature	-20° C to 60° C
Storage Temperature	-20° C to 60° C
Relative Humidity	100%, condensation
Warranty Details	12 Months

## GNSS Performance & Specifications

Compatible motherboard	K726
GNSS Frequency	
BDS	B1I / B2I / B3I / B1C / B2a
GPS	L1 / L2 / L5
GLONASS	L1, L2, L2C,
Galileo	E1 / E5a / E5b
QZSS	L1 / L2 / L5
RTK Positioning Accuracy	
Horizontal	±10mm+1ppm (RMS)
Vertical	±15mm+1ppm (RMS)
Initialization time	Typical <10 seconds
Initialization Reliability	>99.9%
Data update rate	Maximum 20 Hz (Raw data) Maximum 20 Hz (Positioning data)

## Communication Interface

1 CAN port;

3 mobile communication modules (2G/3G/4G);

1 dedicated 2.4GHz/5.8GHz WLAN.

## Communication

Mobile communication network

Communication modules 2G/3G/4G

Protocols GSM, CDMA2000/EVDO, WCDMA, TD-SCDMA, LTE-FDD, LTE-TDD

Dedicated 2.4GHz/5.8GHz WLAN

Protocol supported Xlink Communication Protocol

Transmission performance Frequency range 2.400-2.4835GHz/5.735-5.835GHz

Channel spacing 20 MHz

Frequency error/ frequency stability  $\pm 10$  ppm

Communication mode Full duplex

Communication protocol Transparent

Forward error correction FEC

Data rate 6Mbps

Modulation OFDM

Emission performance RF output power Less than 1W  
Subject to regional SRRC/FCC/CE standards

Reception performance Decoding sensitivity -90dbm

## External Hardware Interface

Battery terminal  $\times 1$

SIM card slot  $\times 3$

## Battery Extension Rod

Model B4100

Dimensions (Diameter x Height) 45mm x 1166mm

Capacity 7500mAh 99Wh

Input 12.0 V/1 A (Type-C port)

Output 14.4V/1A

Operating temperature  $-10^{\circ}\text{C}$  to  $45^{\circ}\text{C}$

Port/Panel Power Button  $\times 1$ , Type-C Port  $\times 1$ ,  
Battery Level/Status Display Panel  $\times 1$

Warranty Details 6 Months



---

Copyright©2022 XAG Australia All Rights Reserved

The copyright of all information in this user manual (including but not limited to any text description, illustrations, photos, methods, processes, etc.) belongs to XAG Australia and is protected by copyright law. No individual or organization may imitate, extract, translate, distribute or reproduce or quote all the contents of this manual without any written authorization.